

**Intelligent
management router**

High coverage, strong signal

AX3000 Wireless Dual Band Wi-Fi 6 Router

BL-AX3000G



Wi-Fi 6



Easy
MESH



Full Gigabit
ports



MU-MIMO
technology



Dual-band
3000M

Features

New Wi-Fi6 Technology

The new generation of Wi-Fi6 standard is adopted, combined with MU-MIMO technology, which greatly improves the efficiency of data transmission; WPA3 encryption technology is adopted to effectively ensure data security.


Easy-Mesh

Support easy-mesh function, through "one-key mesh", without professional knowledge, easy to realize Wi-Fi network expansion.

Multiple work modes

Support routing, relay, AP, universal relay and other working modes, which can meet the various needs of different users in different scenarios, and the setting wizard can be easily switched.



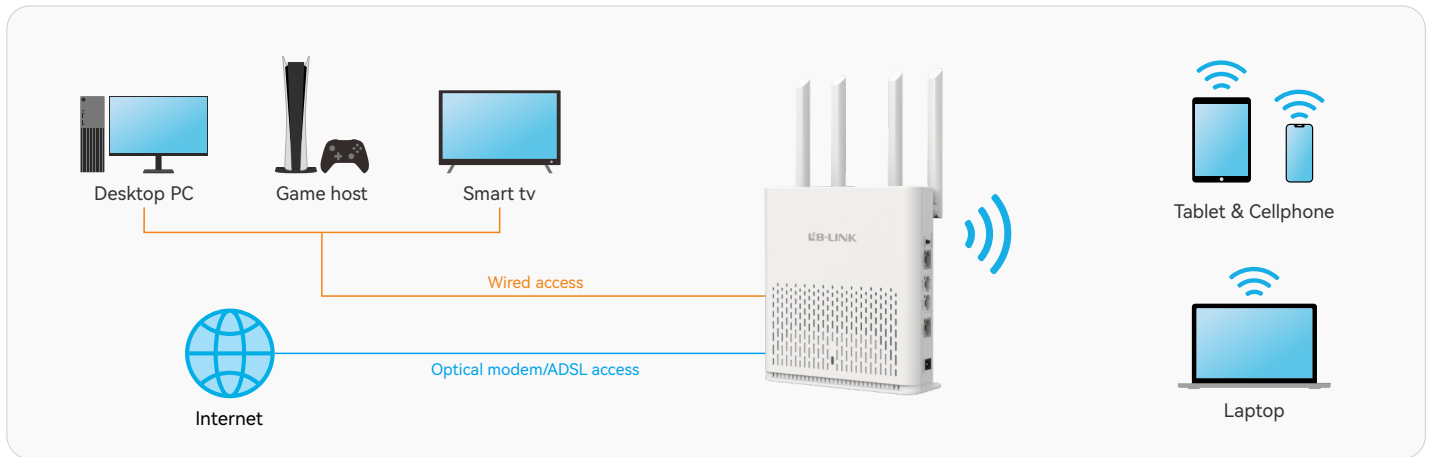

Specifications

Standards	IEEE802.11a, IEEE802.11b, IEEE802.11g, IEEE802.11n, IEEE802.11ac, IEEE802.11ax IEEE802.3, IEEE802.3u, IEEE802.3ab
Transmission Speed	2.4GHz: 574Mbps 5GHz: 2402Mbps
Frequency Range	2.4G: 2.4~2.4835GHz 5G: 5.15~5.85GHz
Transmit Power	20dBm
Interface	1x10/100M/1000M adaptive WAN 3x10/100M/1000M adaptive LAN
Indicator light	Networking indicator light Port link/Act indicator
Antennas	5x high-gain omnidirectional antennas (4 external, 1 internal)
Working Mode	Routing Mode, Repeater Mode, AP Mode, Universal Repeater Mode
Working Environment	Operating temperature: 0°C~40°C (32°F~104°F) Storage temperature: -40°C~70°C (-40°F~158°F) Working humidity: 10%~90% RH non-condensing Storage humidity: 5%~90% RH non-condensing

