

D-OpenWRT



AC1200 Wireless Dual Band Smart Router

BL-W1210M



Easy Setup



3 in 1
Mode



AC1200Mbps
High Speed



Dual Band
2.4G+5G



4*High Gain
Antennas



Guest
Network



TR069

ACS



WPS



IPv6

IPv6

Features

High Speed:

1200Mbps wireless speed ideal for interruption sensitive applications like HD video streaming.

Guest Network:

Provides separate access for guests while securing the home network.


IPv6:

Compatible with the most recent Internet Protocol version (IPv6). Keep your router future-proof and enjoy the IPv6 services provided by your ISP.

ACS/TR096:


A protocol that offers versatile managing ways for ISPs (Internet Service Providers) to easily provide maintenance for their sold products remotely.



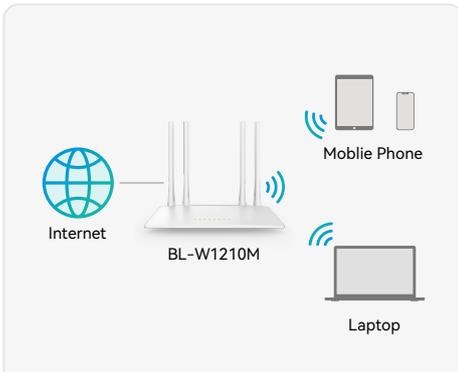


Router Mode

Connect to the Ethernet to instantly create a private wireless network and share internet access to all your Wi-Fi devices.

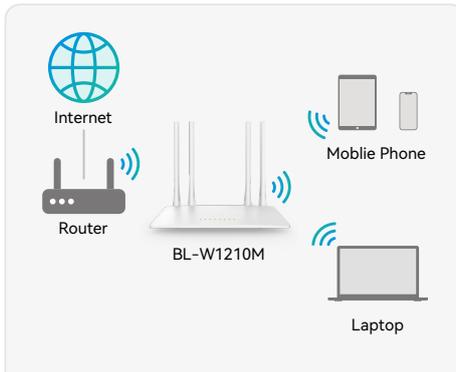

Repeater Mode

Boost the existing wireless coverage in your Room, It also works better with other brands' WiFi router available on the market. For whole home WiFi coverage.

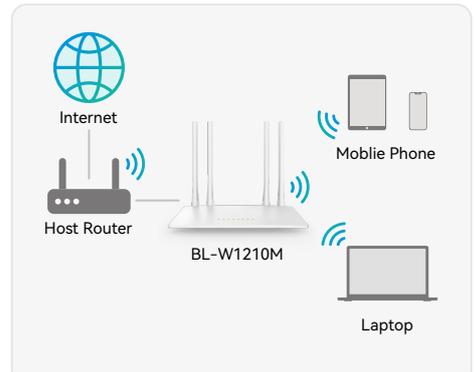

Access Point Mode

Extend your existing wired network into a wireless Wi-Fi signal.

Specifications

Product Type	1200Mbps 11AC Wireless Dual Band Smart Router														
Protocols	IEEE802.11b/g/n/ac, IEEE802.3, IEEE802.3u, CSMA/CD,DHCP,TCP/IP														
Wireless Security	IP/MAC Address Filter, WEP, WPA-PSK, WPA2-PSK, WPA-PSK/WPA2-PSK														
Wireless Transmission Power	2.4GHz (MAX): 17dBm, 5GHz (MAX): 17dBm														
Reception Sensitivity	<table border="0"> <tr> <td>2.4GHz</td> <td>5GHz</td> </tr> <tr> <td>300M:-71dBm@10%PER</td> <td>11ac HT80: -58dBm</td> </tr> <tr> <td>130M:-72dBm@10%PER</td> <td>11ac HT40: -62dBm</td> </tr> <tr> <td>54M:-76dBm@10%PER</td> <td>11ac HT20: -66dBm</td> </tr> <tr> <td>11M:-89dBm@8%PER</td> <td></td> </tr> <tr> <td>6M:-93dBm@10%PER</td> <td></td> </tr> <tr> <td>1M:-96dBm@8%PER</td> <td></td> </tr> </table>	2.4GHz	5GHz	300M:-71dBm@10%PER	11ac HT80: -58dBm	130M:-72dBm@10%PER	11ac HT40: -62dBm	54M:-76dBm@10%PER	11ac HT20: -66dBm	11M:-89dBm@8%PER		6M:-93dBm@10%PER		1M:-96dBm@8%PER	
2.4GHz	5GHz														
300M:-71dBm@10%PER	11ac HT80: -58dBm														
130M:-72dBm@10%PER	11ac HT40: -62dBm														
54M:-76dBm@10%PER	11ac HT20: -66dBm														
11M:-89dBm@8%PER															
6M:-93dBm@10%PER															
1M:-96dBm@8%PER															
LED Lights	Power, 2.4G_WiFi, 5G_WiFi, WPS, WAN, LAN(1-4)														
Signal Rate	Up to 1200Mbps														
Frequency	2.4GHz, 5GHz														
Interface	One 10/100Mbps WAN port Four 10/100Mbps LAN ports														
Antenna	4*5dBi High-gain Omni Directional														
Button	One Reset/WPS Multiplex button														
Environment	Operating temperature: 0°C~40°C (32°F~104°F) Storage temperature: -20°C~70°C (-4°F~158°F) Operating humidity: 10%-90% RH Without condensation Storage humidity: 5%-90% RH No condensation														

